

Warewashing

Small Single Skin Glasswasher with Drain Pump and Detergent Dispenser, 1 cycle, 30b/h

ITEM # _____

MODEL # _____

NAME # _____

SIS # _____

AIA # _____


402081 (EGWSG)

Glasswasher (small), single skin, with drain pump and detergent dispenser, 1 cycle, 30b/h

Short Form Specification

Item No. _____

Unit shall be Glasswasher type hot water rinsing for rack dimension of 400*400mm. Electrical characteristics to be 230 single phase operation with one wash cycle of 120 seconds. Rinse temperature and pressure guaranteed by built in pressure boiler. Washing performance is ensured by a powerful wash pump, revolving washing spray arms. Double skinned counter-balance door. 304 stainless steel construction to include door, frame, wash tank, wash arm and rinse arms. The unit shall include drain pump, detergent and rinse aid dispenser pump and be equipped with electric cable with Schuko plug.

Main Features

- Built-in pressure boiler designed to raise incoming water to a guaranteed minimum temperature of 82° C for sanitizing rinse. No external boiler is required.
- Washing system endowed with rotating washing arms, high powered wash pump and large capacity wash tank for professional washing.
- Maximum capacity of 30 racks per hour.
- 120 seconds cycle.
- Simple operation control panel.
- Solid double skinned counter-balance stainless steel door with hurt-free handle in plastic.
- Equipped with single phase electrical cable and Schuko plug for easy and fast installation.
- Easy service access to main components without moving the unit.

Construction

- Robust structure thanks to stainless steel construction.
- Equipped with drain pump for easy and quick installation without opening the machine.
- Detergent dispenser for easy connection to the external detergent source.
- Unit to feature rinse aid dispenser pump.
- Requires only 1 phase 230V supply.
- Completely closed on the back by a cover plate.
- Internal components (arms and filter) are easy extractable.

Included Accessories

- 1 of Square basket for glasses 400x400x150mm PNC 864470
- 1 of Insert for 12 saucers, 290X90x75mm PNC 867048
- 1 of Square cutlery container, 89x113x113mm PNC 867049


Optional Accessories

- Square basket for glasses, 400x400x1100mm PNC 867039
- Round basket for glasses, 400x180mm PNC 867047
- Square basket with angles for glasses 400x400x150 PNC 867067
- Inclination insert for glasses 400x400 mm PNC 867069


APPROVAL: _____

 Warewashing
 Small Single Skin Glasswasher with Drain Pump and Detergent Dispenser, 1 cycle, 30b/h

Front

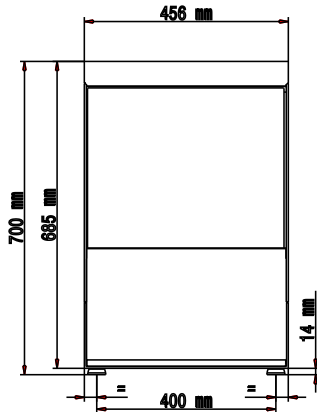


Side

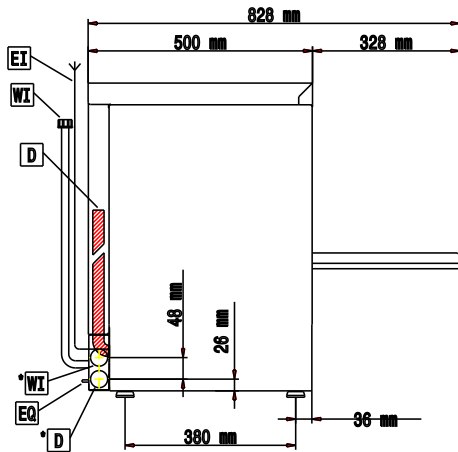

- | | |
|-------------------------------|---------------------------|
| CWII = Cold Water inlet 1 | XR = Rinse aid connection |
| D = Drain | |
| EI = Electrical inlet (power) | |
| EO = Electrical Outlet | |
| WI = Water inlet | |
| XD = Detergent connection | |

Top

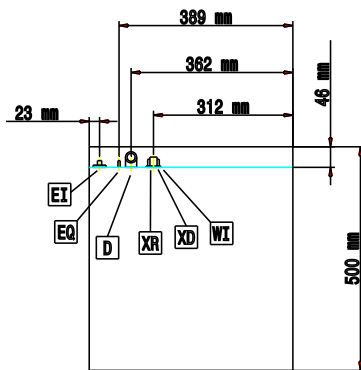

Electric

Supply voltage:	
402081 (EGWSG)	230 V/1N ph/50 Hz
Default Installed Power:	2.7 kW
Tank heating elements:	2 kW

Water:

Pressure, bar min/max:	2-5 bar
Water supply temperature*:	10-65 °C
Drain line size:	18mm
Boiler Capacity (lt):	2.5
Incoming water line size:	3/4"
Washing tank capacity (lt):	16
Min hot rinse water consumption (lt/cycle)**:	2

Key Information:

Baskets per hour*:	30
N° of working cycles - sec.:	1 (120)
Cell dimensions - width:	400 mm
Cell dimensions - depth:	400 mm
Cell dimensions - height:	290 mm
External dimensions, Width:	456 mm
External dimensions, Height:	700 mm
External dimensions, Depth:	495 mm
Net weight:	35 kg
Shipping weight:	40 kg
Shipping height:	840 mm
Shipping width:	560 mm
Shipping depth:	580 mm
Shipping volume:	0.27 m ³
Noise level:	61 dBA
Washing cycle temperature:	60 °C
Hot rinse cycle temperature:	82 °C